



# Bubble Jet Nozzle




The Bubble Jet / Schaume white foam spraying nozzle, contrast to Giant Cascade and Sky Geyser, function independently from the water level. Change in the water level has no effect on the water pattern. When water runs into the basin, for stepped pools or fountain installations with a lower reservoir, this nozzle type has wide field of application, since return valve, which are often troublesome, are unnecessary here. Due to the high quantity of air that is mixed in, a voluminous water effect is achieved with a relatively small quantity of water. This makes the foam jet very soft, highly compact and exceptionally foamy. It stands out, highly contrasted against its surroundings.

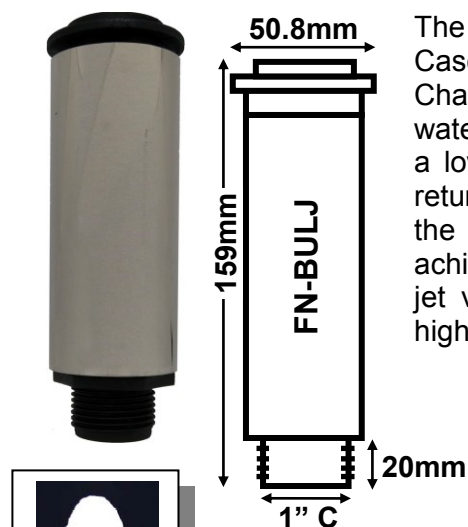

Schaume 35-10E  
FNS35-10E

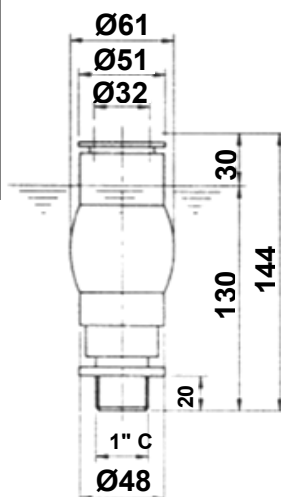

Schaume 55-15E  
FNS55-15E

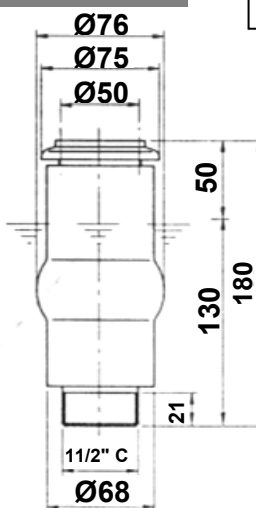

C = Connection  
FH = Fountain Height  
NPB = Nozzle Pressure Demand  
PD = Nozzle Pressure Demand  
GW = Gross Weight  
MA = Material

| Hydro Data | Bubble Jet – 1" connection |      |      |
|------------|----------------------------|------|------|
|            | NWD                        | NPD  | NPD  |
| FSH        | L/min                      | mWS  | Bar  |
| 1.00m      | 81.23                      | 2.76 | 0.28 |
| 1.25m      | 89.77                      | 3.38 | 0.34 |
| 1.50m      | 97.57                      | 3.99 | 0.40 |
| 1.75m      | 104.79                     | 4.61 | 0.46 |
| 2.00m      | 111.55                     | 5.23 | 0.52 |
| 2.50m      | 123.97                     | 6.46 | 0.65 |
| MA         | Stainless Steel and Nylon  |      |      |
| GW         | 0.4kg                      |      |      |

| C.       | Schaume 35-10E              |         | Schaume 55-15E |         |
|----------|-----------------------------|---------|----------------|---------|
|          | 1"                          |         | 1 1/2"         |         |
| Hydro FH | NWD L/min                   | NPD Bar | NWD L/min      | NPD Bar |
| 0.25m    | 47.10                       | 0.10    |                |         |
| 0.50m    | 55.10                       | 0.14    | 125.00         | 0.11    |
| 0.75m    | 71.18                       | 0.22    | 151.69         | 0.15    |
| 1.00m    | 80.73                       | 0.28    | 176.45         | 0.19    |
| 1.25m    | 89.27                       | 0.34    | 198.16         | 0.24    |
| 1.50m    | 97.07                       | 0.40    | 217.74         | 0.28    |
| 1.75m    | 104.29                      | 0.46    | 235.70         | 0.33    |
| 2.00m    | 111.05                      | 0.52    | 252.40         | 0.38    |
| 2.50m    | 123.47                      | 0.65    | 282.90         | 0.48    |
| 3.00m    |                             |         | 310.45         | 0.58    |
| 3.50m    |                             |         | 335.78         | 0.64    |
| 4.00m    |                             |         | 359.37         | 0.77    |
| 4.50m    |                             |         | 381.53         | 0.87    |
| 5.00m    |                             |         | 402.51         | 0.97    |
| 6.00m    |                             |         | 441.56         | 1.16    |
| 7.00m    |                             |         | 447.53         | 1.36    |
| MA       | Stainless Steel and Plastic |         |                |         |
| GW       | 0.5kg                       |         | 1.4kg          |         |